



TC-C34UV 3FRB-4

4MP Fixed Polar Day Bullet Camera

Lite Series



KEY FEATURES


- Metal+plastic housing
- Up to 4MP, 2688×1520@25fps
- S+265/H.265/H.264B/H.264M/H.264H
- Color: 0.0001Lux@(F1.0, AGC ON)
- 1×Built-in Mic
- Support microSD/microSDHC/microSDXC card, up to 512GB
- Support smart surveillance
- Support human/vehicle classification
- Operating conditions -35°C~65°C (-31°F~149°F), ≤95%RH
- DC12V±25%, Max. 9W, PoE: IEEE 802.3af, Max. 9.6W
- IP67

SPECIFICATIONS

Camera	
Image Sensor	1/1.8"CMOS
Min. Illumination	Color:0.0001Lux@(F1.0,AGC ON)
Shutter Time	1s~1/100000s
Day&Night	Fixed IR-cut
WDR	120dB
S/N	>46dB
Angle Adjustment	0~360°(P); 0~80°(T); 0~360°(R)
Lens	
Lens Type	Fixed focal lens
Focal Length	4mm
Lens Mount	M16
Aperture Range	F1.0
Aperture Type	Fixed
Field of View	88.8°(H); 49.0°(V); 103.1°(D)
DORI Distance	Detect:80m Observe:31.7m Recognize:16m Identify:8m
Illuminator	
White LEDs	4
Whitelight Distance	15m
Compression Standard	
Video Compression	S+265/H.265/H.264B/H.264M/H.264H
Video Bit Rate	32k~6Mbps
Audio Compression	G.711A/G.711U/ADPCM_D
Audio Sampling Rate	8kHz/32kHz/48kHz
Image	
Max. Resolution	4MP,2688×1520@25fps
Main Stream	PAL:25fps(2688×1520, 2560×1440, 2304×1296, 1920×1080, 1280×720) NTSC:24fps(2688×1520, 2560×1440, 2304×1296, 1920×1080, 1280×720)
Sub Stream	PAL:25fps(704×576, 704×288, 640×360, 352×288) NTSC:24fps(704×480, 704×240, 640×360, 352×240)
BLC	Yes
HLC	Yes
AGC	Yes
3D DNR	Yes
White Balance	Auto/Semi-Auto/Manual/Sunshine/Nature Light/Warmlight Lamp/Daylight Lamp/Filament Lamp/Lock White Balance
ROI	8 rectangular static areas
OSD	Overlay of additional characters in 1 regions, 1 line, with a maximum of 48 characters or 16 Chinese characters per region; 16*16/32*32/48*48/64*64; Lattice

Privacy Mask	4 black static areas
Defog	Yes
Feature	
General Alarm	Motion Detection; Mask Alarm
Exceptions Alarm	Voltage Alarm; Disk Full; Disk R/W Error; IP Address Conflict; MAC Address Conflict; FTP Server Exception ; Network Disconnection
Linkage Method	Send Email; Trigger Recording; Trigger Capture; Notify Surveillance Center
Video Analytics	Human/Vehicle Classification; Tripwire; Perimeter
Rules of Behavior Analyse In 1 Scene	2
Network	
ANR	Yes
Protocols	RTSP; HTTP; HTTPS; TCP; UDP; UPnP; ICMP; IGMP; SNMP v1\v2\v3; DHCP; DNS; DDNS; Easy DDNS; NTP; SMTP; TLS v1.2; SSL; QoS; IPv4; IPv6; SSH; Unicast; Multicast; RTCP; ARP; RTP; SRTP; FTP
System Compatibility	ONVIF(Profile S/T/G/M) ; SDK; CGI; Milestone
Remote Connection	≤2
Client	Easy7 VMS
Moblie Client	EasyLive Plus
Web	IE10+; Firefox52+; Edge89+; Safari11+; Chrome57+
Interface	
Communication Interface	1×RJ-45 (10/100 Base-T)
Built-in Mic	1×Built-in Mic
Reset Button	Yes
On-board Storage	Support microSD/microSDHC/microSDXC card,up to 512GB
RTC	Yes
General	
Web Client Language	19 languages Simple Chinese/Traditional Chinese/English/Spanish/Korean/Italian/Turkish/Russian/Thai/French/ Polish/Dutch/Hebrew/Arabic/Vietnamese/German/Ukrainian/Portuguese/Albanian
Operating Temperature	-35°C~65°C(-31°F~149°F)
Operating Humidity	≤95%RH
Storage Temperature	-35°C~65°C(-31°F~149°F)
Storage Humidity	10%~95%RH(non-condensing)
Power Supply	DC12V±25%,Max. 9W; PoE:IEEE 802.3af,Max. 9.6W
Protection	Surge4000V; ESD6000V; IP67
Boundary Dimensions	204(L)84(W)76(H)mm
Package Dimensions	215(L)95(W)120(H)mm
GrossWeight	0.60kg

DIMENSIONS (Unit: mm)

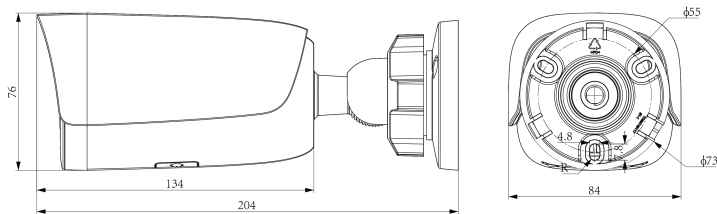

Assembly diagram of Junction Box



TC-P54BM Spec:V5



A36